

ROCK WOOL Manufacturing Company

Corporate Office: 205.699.6121

P. O. Box 506

Sales Office: 205.699.6513

TeleFax: 205.699.3132

Leeds, Alabama 35094-0506 U.S.A.


TeleFax: 205.699.3559

Re: Pin Placement for Delta Marine Board A-60 Bulkhead and A-60 Deck Assemblies


During the compliance tests for our A-60 ratings, the following pin placement was used on both the bulkhead and deck assembly. A starting twelve gauge pin was placed on the bulkhead/ deck six inches from the top and six inches from the side. The layout was on a twelve inch grid from that point (see diagram). The stiffener pins were placed three inches from the top and then every twelve inches down the stiffener. All pins were secured using one and a half inch stainless steel washers.

If you have any questions concerning our assembly set up, feel free to call us at 205-699-6513.

Sincerely,

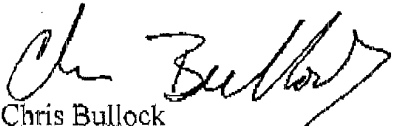

Chris Bullock
Rock Wool Manufacturing Company

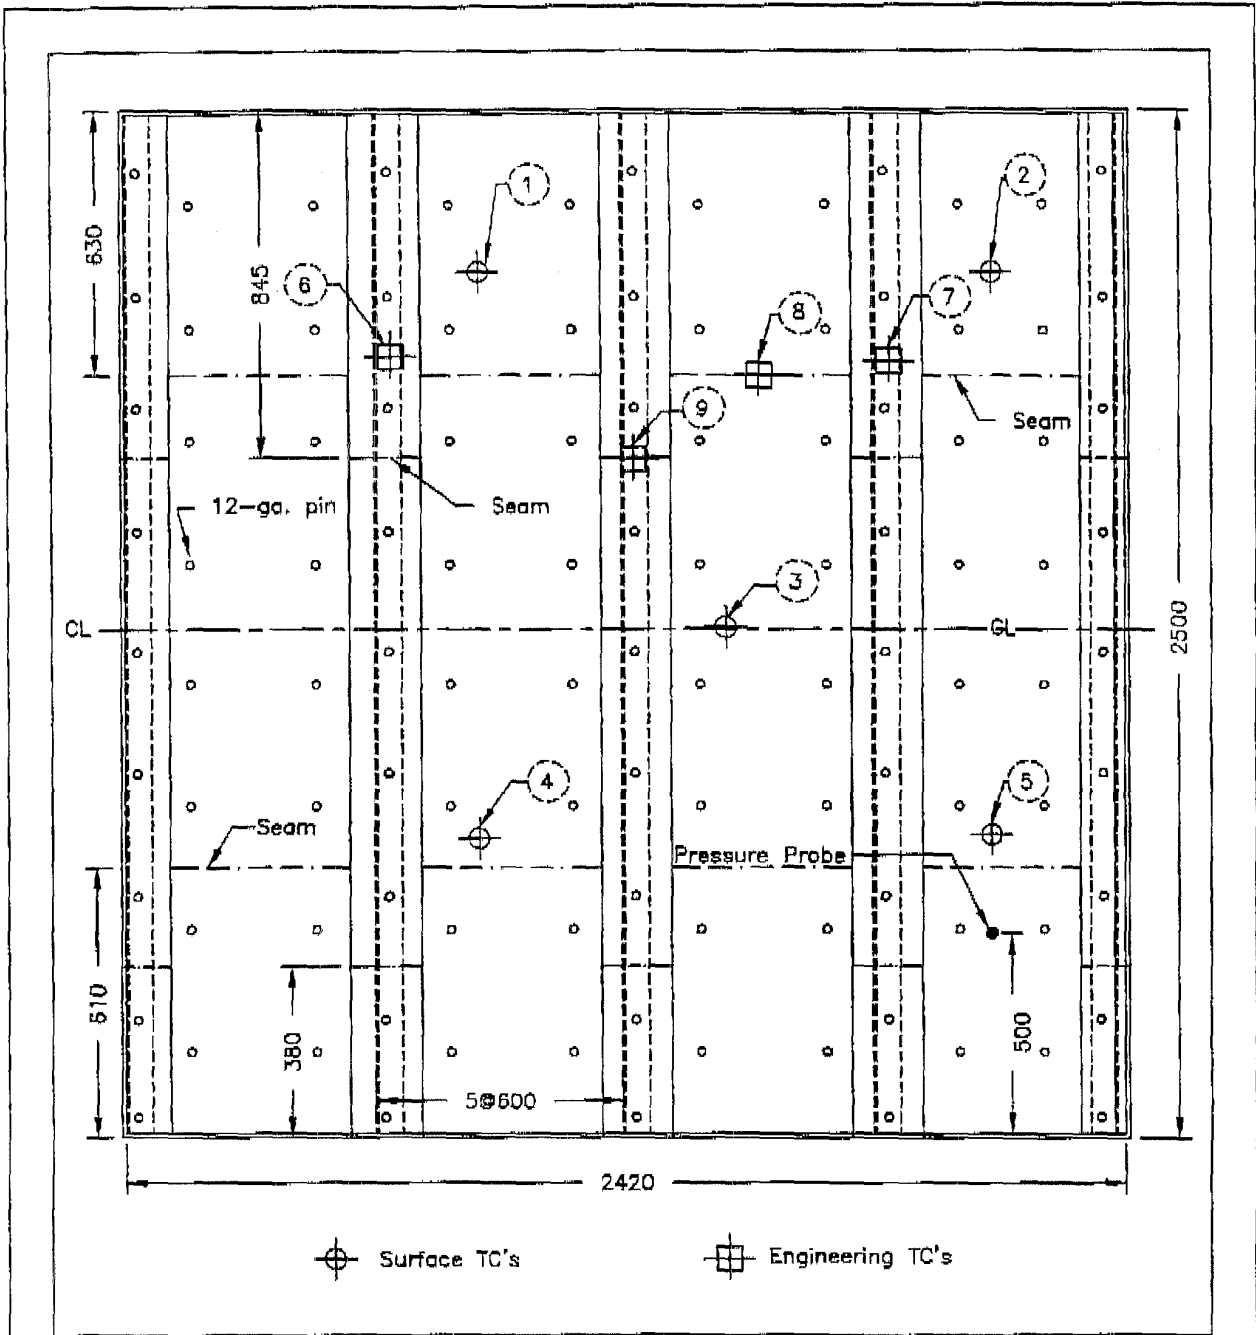

Southwest Research
Institute

Bulkhead Test Thermocouple and Seam Details

CLIENT
Rock Wool Manufacturing Company

PROJECT NO.
01.02305.313a

DRAWN BY:
A. Garabedian

DATE
11/20/99

SCALE/UNITS
NTS/mm