

**Incombustible Microlite®**  
*Fiber Glass Thermal and Acoustical Blanket*

**Description**

Incombustible Microlite insulation is specifically developed as a thermal and acoustical blanket for use in marine applications. Produced from fine glass fibers and bonded with a thermo-setting resin, it is lightweight, highly resilient and has nonsettling characteristics.

**Advantages**

**High Thermal Performance.** The extremely low conductivity of Incombustible Microlite assures optimum operating efficiency of shipboard heating and air conditioning systems.

**Fire Safety.** Incombustible Microlite is Coast Guard/IMO Approved 164.109/38/0 as an incombustible material. It also meets the requirements of NFPA 90A and 90B Standards, and has an FHC flame spread of less than 25 and a smoke developed rating of less than 50 per ASTM E 84.

**Noise Control.** Incombustible Microlite has excellent sound absorption characteristics to reduce the level of unwanted noise.

**Faster Installation.** Incombustible Microlite is easily cut and installs with a minimum of effort.

**Superior Performance.** Properly installed Incombustible Microlite will remain unaffected by age and temperature change.


**Government Certification**

When ordering material to comply with any government, ASTM or listed specification, a statement of that fact must appear on the purchase order. Government regulations and other listed specifications require specific lot testing and prohibit certification of compliance after shipment has been made. There may be additional charges associated with specification compliance testing.

**Thermal Conductivity “(k)”**

Mean Temp.	75°F	24°C
	.29*	.042**

*Conductivity per ASTM C 518: \*Btu•in/(hr•ft²•°F); \*\*W/m•°C*

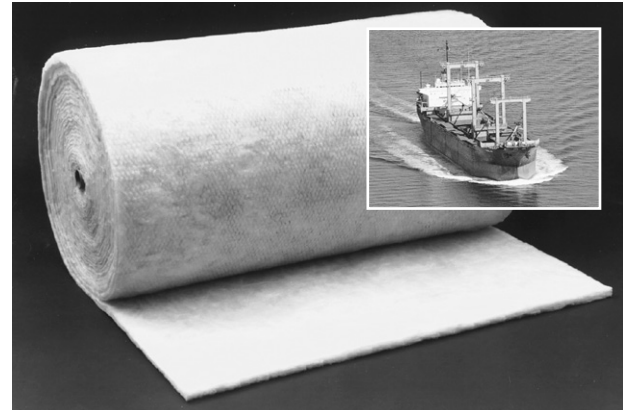

**Operating Temperature Limit:** 400°F (204°C)

**Specification Compliance**

- Coast Guard/IMO Approved 164.109/38/0
- MIL-I-24244C (Cleburne material only)
- NRC 1.36 (Cleburne material only)
- ASTM C 795
- ASTM C 411 (up to 400°F [204°C])
- ASTM E 84
  - Flame Spread – Not exceeding 25
  - Smoke Developed – Not exceeding 50
- NFPA 90A and 90B Standards
- ASTM C 1139 Types I & II, Grade 1  
 (Replaces MIL-I-22023, Types I & II, Class 2)
- ASTM C 356
- ASTM C 553 Types I & II
- ASTM C 1304
- ASTM C 1338
- ASTM C 665 – Corrosion test
- Capillarity – Negligible (after 24 hours)

# Incombustible Microlite®

## Fiber Glass Thermal and Acoustical Blanket

### Sound Absorption Coefficients – ASTM C 423 (Type "A" Mounting)

Density		Thickness		Facing	Sound Absorption Coefficient at Frequency (Cycles per Second) of:						
pcf	kg/m <sup>3</sup>	in.	mm		125	250	500	1000	2000	4000	NRC
0.75	12	½	13	Plain	0.13	0.46	0.43	0.60	0.76	0.86	0.55
0.75	12	1	25	Plain	0.15	0.58	0.62	0.75	0.84	0.90	0.70
0.75	12	2	51	Plain	0.30	0.82	0.86	0.98	1.02	1.07	0.90
0.75	12	4	102	Plain	0.64	1.21	1.14	1.10	1.10	1.16	1.15

### Standard Sizes

#### Standard Width: 48" (1219 mm)\*

Density		Thickness		Width		Roll Length	
pcf	kg/m <sup>3</sup>	in.	mm	in.	mm	ft.	m
0.75	12	1½	38	48	1219	100	30.5
0.75	12	2	51	48	1219	75	22.9
0.75	12	2½	64	48	1219	50	15.3
0.75	12	3	76	48	1219	50	15.3

\*Additional widths available on a Special Product Price Inquiry (SPPI) basis.

**Note:** 3½" to 6" (89 mm to 152 mm) thicknesses available on a Special Product Price Inquiry (SPPI) basis.

### ISO 9000 Certification

Johns Manville mechanical insulation products are designed, manufactured and tested in our own facilities, which are certified and registered to stringent ISO 9000 (ANSI/ASQC 90) series quality standards. This certification, along with regular, independent third-party auditing for compliance, is your assurance that Johns Manville products deliver consistent high quality.



717 17th St.  
Denver, CO 80202  
(800) 654-3103  
www.JM.com

### North American Sales Offices, Insulation Systems

**Eastern Region**  
P.O. Box 158  
Defiance, OH 43512  
(800) 334-2399  
Fax: (419) 784-7866

**Western Region and Canada**  
P.O. Box 5108  
Denver, CO 80217  
(800) 368-4431  
Fax: (303) 978-4661

The physical and chemical properties of Incombustible Microlite® listed herein represent typical, average values obtained in accordance with accepted test methods and are subject to normal manufacturing variations. They are supplied as a technical service and are subject to change without notice. Numerical flame spread and smoke developed ratings are not intended to reflect hazards presented by this or any other materials under actual fire conditions. Check with the Regional Sales Office nearest you to assure current information. **All Johns Manville products are sold subject to Johns Manville's standard Terms and Conditions, including Limited Warranty and Limitation of Remedy. For a copy of the Johns Manville standard Terms and Conditions, Limited Warranty and Limitation of Remedy and information on other Johns Manville thermal insulation and systems, call (800) 654-3103.**

♻️ Printed on recycled paper.

© 2010 Johns Manville. Printed in USA.